

Copper Keystone RJ45 CAT 5E UTP

Punch 110



Application

Horizontal distribution & Backbone Cabling, 4/16 Mbps Token Ring (IEEE 802.5), 10/100/1000 BASE-T (IEEE 802.3), 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, ADSL, analog (broadband, baseband) and digital video and analog and digital (VoIP) voice.

Description

ORCA® Category 5E Series jacks exceed TIA/EIA-568-A and TIA/EIA-568-B requirements for Category 5E component performance. The Category 5E System complies with all of the performance requirements for current and proposed applications.

Material specification


Dimension: 22,8 (H) x 18,2 (W) x 32 (D)

Performance

Dielectrics strength: 750 Vac RMS 60Hz, 1 min
Insulation resistance: 1000 MΩ Min.

Standard compliance and approvals

ANSI/TIA-568-C. 2, ISO/IEC 11801: 2002/ Amd. 2: 2010, Meet EN50173, RoHS Directive 2011/65/EU compliant

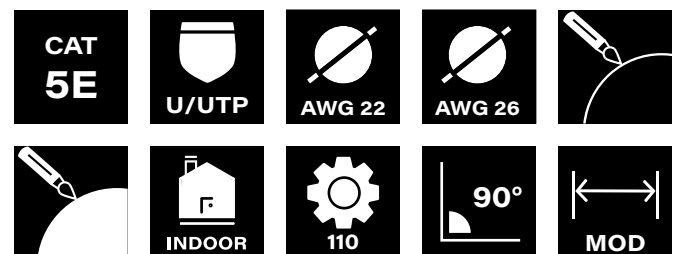

| CODE | DESCRIPTION |
|-----------|-------------------------------------|
| 232120-00 | ORCA – Insert RJ45 CAT 5E UTP White |
| 232130-00 | ORCA – Insert RJ45 CAT 5E UTP Black |